


### 1、 Features:

- Emitting Color: Yellow
- Lens Type: Water Clear
- Device Outline: 3.2×1.6×1.1 (unit:mm)
- RoHS compliant

### 2、 Applications:

- Backlight for Mobile, Machine Vision, LCD Display
- Backlight in Dashboard and switch of Automotive

### 3、 Outline Dimensions:

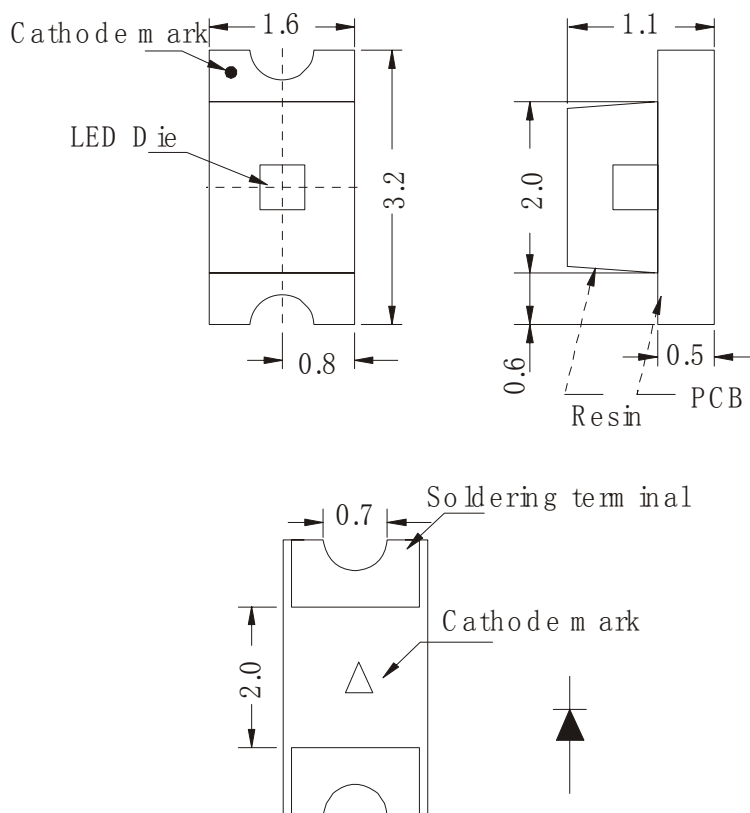

Note: 1.All dimension units are millimeters

2. All dimension tolerance is  $\pm 0.10\text{mm}$

**4、 Absolute maximum ratings ( Ta = 25°C ):**

Parameter	Symbol	Test Condition	Value		Unit
			Min.	Max.	
Power Dissipation	Pd	—	—	60	mW
Reverse Voltage	VR	IR = 30 μ A	5	—	V
Pulse Current	IFp	Duty=0.1, 1kHz	—	100	mA
Forward Current	IFm	—	—	25	mA
Operating Temperature	Topr	—	-40	+85	°C
Storage Temperature	Tstr	—	-40	+85	°C

**5、 Electrical and optical characteristics ( Ta = 25°C ):**

Parameter	Symbol	Test Condition	Value			Unit
			Min.	Typ.	Max.	
Forward Voltage	VF	IF = 20mA	1.8	2.0	2.2	V
Reverse Current	IR	VR = 5V	—	—	30	μ A
Wave Length	Tc	IF = 20mA	—	590	—	nm
Luminous Intensity	Iv	IF = 20mA	50	100		mcd
Viewing Angle	2 θ 1/2	IF = 20mA	—	120	—	Deg.