



## JSL-1002 Series (10mm round bullet ultra brightness LED diode)

### Features:

- 1.Ultra brightness.
- 2.Choice of various viewing angles
- 3.IC compatible /Low current capability
- 4.Long life solid state reliability.
5. RoHs compliant.

### Electrical and optical characteristics(Ta=25 °c)

Part Number	Dice material And color	Lens color	Peak Wavelength	Vf(V) Typ	Iv(mcd)			Viewing Angle 2 θ 1/2
					Min	Typ	Max	
JSL-1002URC	AlGaInP/Ultra Red	Water Clear	625nm	2.0	15000	20000	25000	10°
JSL-1002UYC	AlGaInP/Ultra Yellow	Water Clear	590nm	2.0	15000	20000	25000	10°
JSL-1002UAC	AlGaInP /Ultra Amber	Water Clear	610nm	2.0	15000	20000	25000	10°
JSL-1002UBC	InGaN/Ultra Blue	Water Clear	470nm	3.2	16000	22000	28000	10°
JSL-1002BGC	InGaN/Bluish Green	Water Clear	505nm	3.2	20000	25000	30000	10°
JSL-1002PGC	InGaN/Pure Green	Water Clear	525nm	3.2	25000	30000	40000	10°
JSL-1002UPC	InGaN/Super Pink	Water Clear	-----	3.2	15000	20000	25000	10°
JSL-1002UWC	InGaN/Ultra White	Water clear	6000k	3.2	25000	30000	40000	10°
JSL-1002WWC	InGaN/Ultra White	Water clear	6000k	3.2	25000	30000	40000	10°




## JSL-1002 Series

### Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	UR	UY	UG	UA	UB	BG	PG	UV	UP	UW	WW	Unit
Forward Current	I <sub>F</sub>	25	25	25	25	30	30	30	30	30	30	30	mA
Power Dissipation	P <sub>d</sub>	60	60	60	60	100	100	100	100	100	100	100	mW
Reverse Voltage	V <sub>R</sub>	5											V
Peak Forward Current (Duty 1/10 @1KHZ)	I <sub>PF</sub>	150											mA
Operation Temperature	T <sub>OPR</sub>	-40 to +80											°C
Storage Temperature	T <sub>STG</sub>	-40 to +85											°C

### Package configuration:

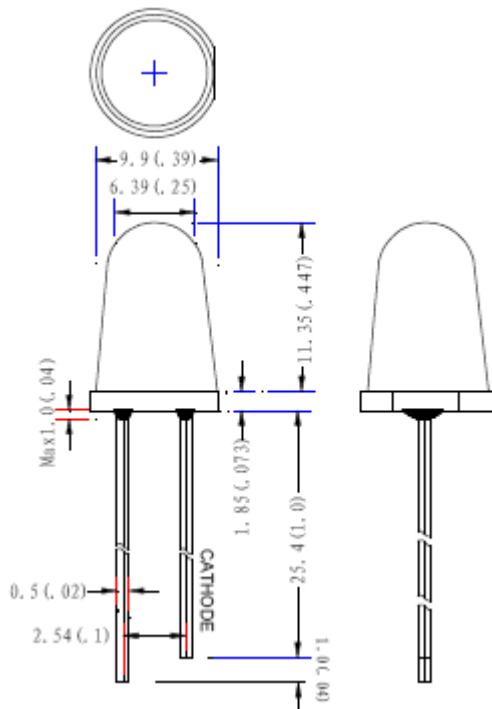

- 1.All dimensions are millimeters (inches)
- 2.Tolerance is  $\pm 0.25\text{mm}$ (.010") unless otherwise noted.