



JSL-252 Series

(2x5mm ultra brightness LED diode, no flange)

Features:

- 1.Ultra brightness.
- 2.Choice of various viewing angles
- 3.IC compatible /Low current capability
- 4.Long life solid state reliability.
5. RoHs compliant.

Electrical and optical characteristics(Ta=25 °c)

Part Number	Dice material And color	Lens color	Peak Wavelength	Vf (V) Typ	Iv(mcd)			Viewing Angle 2 θ 1/2
					Min	Typ	Max	
JSL-252ED	AlGaInP /Red	Red diffused	625nm	2.0	20	50	70	110°
JSL-252URC	AlGaInP /Ultra Red	Water Clear	625nm	2.0	50	100	200	110°
JSL-252YD	AlGaInP/ Yellow	Yellow diffused	590nm	2.0	20	50	70	110°
JSL-252UYC	AlGaInP/Ultra Yellow	Water Clear	590nm	2.0	50	100	200	110°
JSL-252GD	AlGaInP / Green	Water Clear	574nm	2.0	10	30	50	110°
JSL-252UAC	AlGaInP /Ultra Amber	Water Clear	610nm	2.0	50	100	200	110°
JSL-252UBC	InGaN/Ultra Blue	Water Clear	470nm	3.2	100	150	200	110°
JSL-252PGC	InGaN/Pure Green	Water Clear	525nm	3.2	200	500	800	110°
JSL-252UWC	InGaN/Ultra White	Water clear	6000k	3.2	200	500	800	110°
JSL-252WWC	InGaN/Ultra White	Water clear	6000k	3.2	200	500	800	110°




JSL-252 Series

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	UR	UY	UG	UA	UB	BG	PG	UV	UP	UW	WW	Unit
Forward Current	I _F	25	25	25	25	30	30	30	30	30	30	30	mA
Power Dissipation	P _d	60	60	60	60	100	100	100	100	100	100	100	mW
Reverse Voltage	V _R	5											V
Peak Forward Current (Duty 1/10 @1KHZ)	I _{PF}	150											mA
Operation Temperature	T _{OPR}	-40 to +80											°C
Storage Temperature	T _{STG}	-40 to +85											°C

Package configuration:

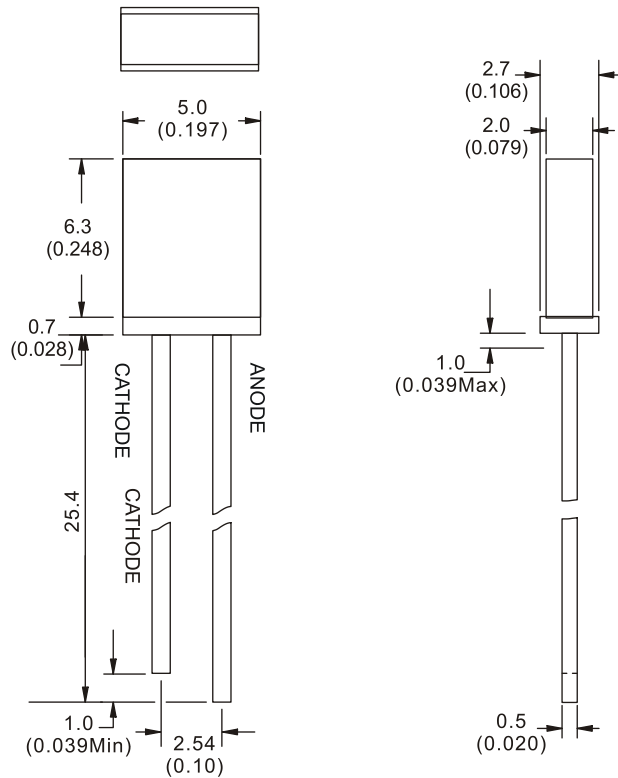

- 1.All dimensions are millimeters (inches)
- 2.Tolerance is ±0.25mm(.010") unless otherwise noted.