



## JSL-325 Series (3mm round bi-color LED diode)

### Features:

- 1.3mm round type, bi-color with 3 leads
- 2.White diffused or water clear lens are available
- 3.IC compatible /Low current capability
- 4.Long life solid state reliability.
5. RoHs compliant.

### Electrical and optical characteristics(Ta=25 °c)

Part Number	Dice material And color		Lens color	Peak Wave length	Vf(V) Typ	Iv(mcd)			Viewing Angle 2 θ 1/2
						Min	Typ	Max	
JSL-325RGW	AlGaInP	Ultra Red	White	625nm	2.0	50	80	100	100°
	AlGaInP	Ultra Green	Diffused	572nm	2.0	10	15	20	
JSL-325YGW	GaAsp/Gap	Ultra Yellow	White	590nm	2.0	50	80	100	100°
	Gap	Ultra Green	Diffused	572nm	2.0	10	15	20	
JSL-325RBW	AlGaInP	Ultra Red	White	625nm	2.0	50	80	100	100°
	AlGaInP	Ultra Blue	Diffused	470nm	3.2	60	80	100	
JSL-325RPGW	AlGaInP	Ultra Red	White	625nm	2.0	50	80	100	100°
	AlGaInP	Pure Green	Diffused	525nm	3.2	200	300	400	
JSL-325RGC	GaAsp/Gap	Hi-eff Red	Water Clear	625nm	2.0	500	800	1000	100°
	Gap	Green		572nm	2.0	50	100	150	
JSL-325YGC	GaAsp/Gap	Yellow	Water Clear	590nm	2.0	500	800	1000	100°
	Gap	Green		572nm	2.0	50	100	150	
JSL-325RBC	AlGaInP	Ultra Red	Water Clear	625nm	2.0	500	800	1000	100°
	AlGaInP	Ultra Blue		470nm	3.2	600	800	1000	
JSL-325RPGC	AlGaInP	Ultra Red	Water Clear	625nm	2.0	500	800	1000	100°
	AlGaInP	Pure Green		525nm	3.2	1000	1500	2000	




**JSL-325 Series**  
**(3mm round bi-color LED diode)**

**Absolute Maximum Ratings at Ta=25°C**

Parameter	Symbol	UR	UY	UG	UB	PG	Unit
Forward Current	I <sub>F</sub>	25	25	25	30	30	mA
Power Dissipation	P <sub>d</sub>	60	60	60	100	100	mW
Reverse Voltage	V <sub>R</sub>	5					V
Peak Forward Current (Duty 1/10 @1KHZ)	I <sub>PF</sub>	150					mA
Operation Temperature	T <sub>OPR</sub>	-40 to +80					°C
Storage Temperature	T <sub>STG</sub>	-40 to +85					°C

**Package configuration:**

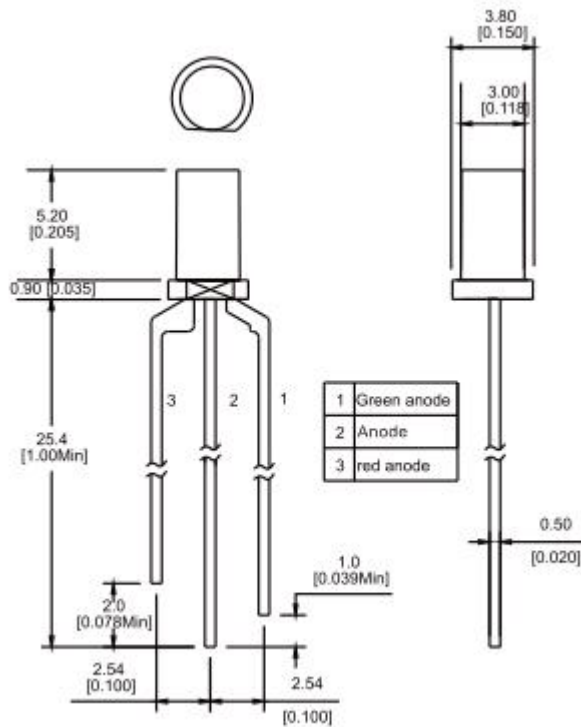

- 1.All dimensions are millimeters (inches)
- 2.Tolerance is ±0.25mm(.010”) unless otherwise noted.