

Ningbo Junsheng Electronics Co.,Ltd.

4.60 "(10.00mm)5x8 bi-color dot matrix Display

Features:

- *Ultra dot intensity
- *Wide viewing angle
- *Range of colors
- *Gray face White segment
- *RoHS compliant

Available option:

- *Alternative face and dot color
- *Cropped terminal pins
- *Available emitting color
- *Low current version

Electro/Optical Characteristics If=20mA Ta=25 C

Part Number Common Cathode	Part Number Common Anode	Emitting Colors	Peak Wavelength	Forward Voltage V		Luminous Intensity Iv	
				Typ.	Max.	Min.	Typ.
JSD-46581AURUG-21	JSD-46581BURUG-21	AlGaInP/GaAs Super Red	630	2.00	2.50	20.00	40.00
		AlGaInP/GaAs Yellow Green	574	2.10	2.50	20.00	30.00
JSD-46581AUEUG-21	JSD-46581BUEUG-21	AlGaInP/GaAs Ultra Red	625	2.00	2.50	80.00	160.0
		AlGaInP/GaAs Yellow Green	574	2.10	2.50	20.00	30.00
JSD-46581AUEUPG-21	JSD-46581BUEUPG-21	AlGaInP/GaAs Ultra Red	625	2.00	2.50	80.00	160.0
		InGaN/SiC Pure Green	525	3.30	3.80	300.00	400.00
Units			nm	V		mcd	

Maximum Ratings Ta=25 C (Derate above 25 C)

Characteristic	Test Condition	Symbol	UR	UE	UG	PG		Units
Pulse Forward Current Per Seg.	1/10 duty cycle 0.1ms Pulse width	I _{FP}	100	100	100	100		mA
DC Forward Current Per Seg.		I _F	30	30	30	30		mA
Reverse Current Per Seg.	V _R =5V	I _R	10	10	10	10		μ A
Power Dissipation		P _D	36	40	44	66		mW
Operating Temperature		T _{OPR}	-40 to +80					℃
Storage Temperature		T _{TSG}	-40 to +85					℃
Lead soldering temperature	1.60mm from body maximum 3 seconds		260					℃

Checked

Becky Sun

Approved

Jason Lou

Date

Aug/14/2013



PAGE 1 /2

Ningbo Junsheng Electronics Co.,Ltd.


4.60 "(10.00mm)5x8 bi-color dot matrix Display

PACKAGE DIMENSION


INTERNAL CIRCUIT DIAGRAM

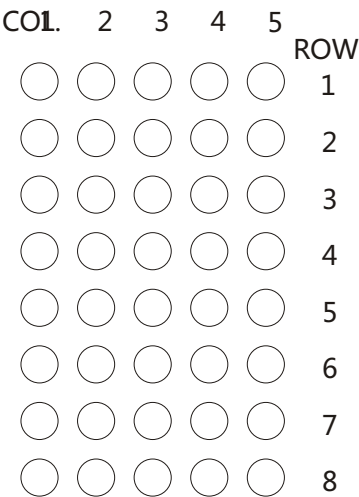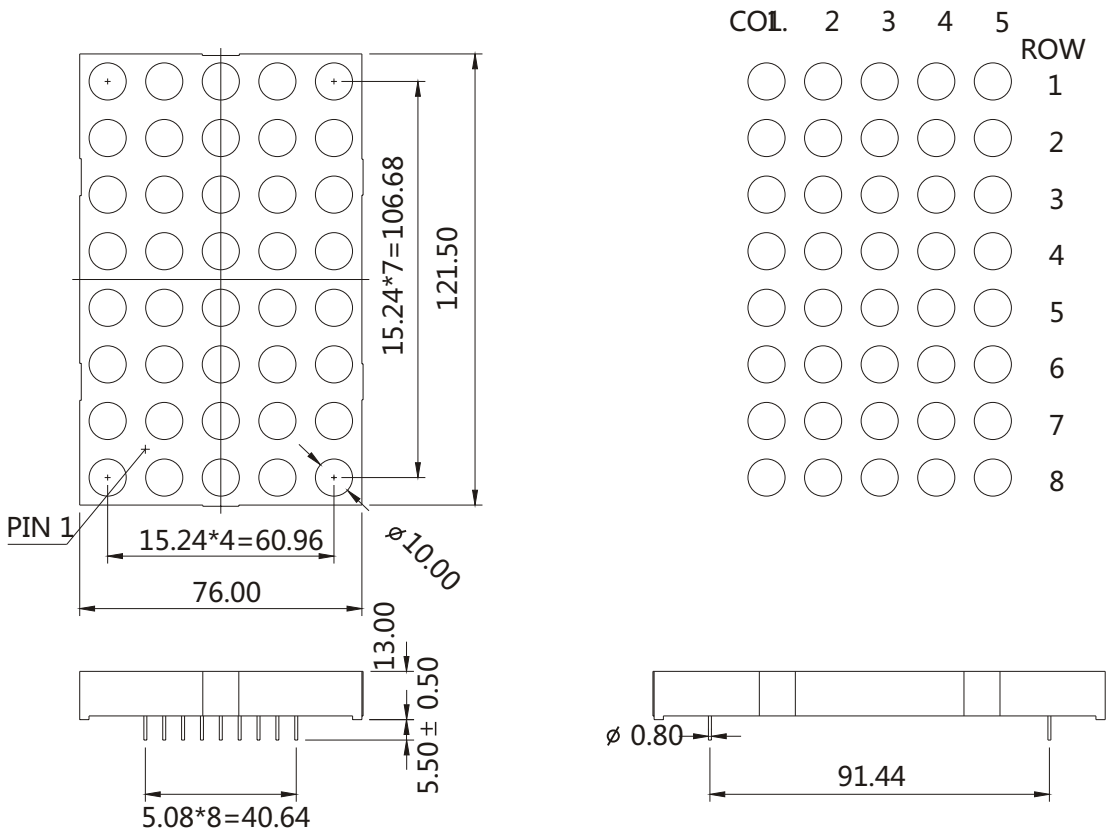

Row Cathode
Column Anode
JSD-46581Axx

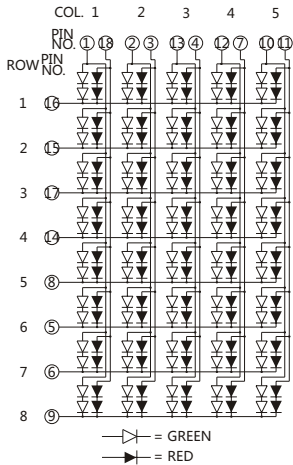

Row Anode
Column Cathode
JSD-46581Bxx

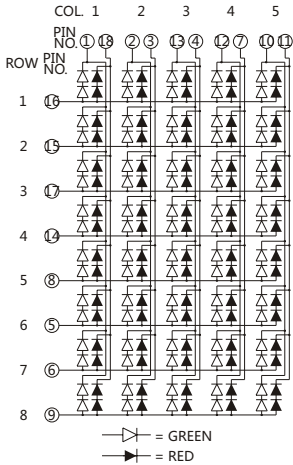

Tolerance ± 0.25 mm unless stated

Checked

Becky Sun

Approved

Jason Lou

Date

Aug/14/2013

PAGE 2 /2