

# Ningbo Junsheng Electronics Co.,Ltd.

## 4.60" (10.00mm)5x8 single color dot matrix Display

### Features:

- \*Ultra dot intensity
- \*Wide viewing angle
- \*Range of colors
- \*Gray face White segment
- \*RoHS compliant

### Available option:

- \*Alternative face and dot color
- \*Cropped terminal pins
- \*Available emitting color
- \*Low current version

### Electro/Optical Characteristics If=20mA Ta=25°C

Part Number Common Cathode	Part Number Common Anode	Emitting Color	Peak Wavelength	Forward Voltage Vf		Luminous Intensity Iv	
				Typ.	Max.	Min.	Typ.
JSD-46581CUR-21	JSD-46581DUR-21	AlGaInP/GaAs Super Red	630	2.00	2.50	20.00	40.00
JSD-46581CUE-21	JSD-46581DUE-21	AlGaInP/GaAs Ultra Red	625	2.00	2.50	80.00	160.00
JSD-46581CUA-21	JSD-46581DUA-21	AlGaInP/GaAs Ultra Amber	605	2.00	2.50	80.00	120.00
JSD-46581CUY-21	JSD-46581DUY-21	AlGaInP/GaAs Ultra Yellow	590	2.00	2.50	80.00	120.00
JSD-46581CUG-21	JSD-46581DUG-21	AlGaInP/GaAs Yellow Green	574	2.10	2.50	20.00	30.00
JSD-46581CPG-21	JSD-46581DPG-21	InGaN/SiC Pure Green	525	3.30	3.80	300.00	400.00
JSD-46581CUB-21	JSD-46581DUB-21	InGaN/SiC Ultra Blue	470	3.30	3.80	80.00	100.00
JSD-46581CUW-21	JSD-46581DUW-21	InGaN/SiC Ultra White	X-0.31/Y-0.31	3.30	3.80	400.00	800.00
Units			nm	V		mcd	

### Maximum Ratings Ta=25°C (Derate above 25°C)

Characteristic	Test Condition	Symbol	UR	UE	UA	UY	UG	PG	UB	UW	Units
Pulse Forward Current Per Seg.	1/10 duty cycle 0.1ms Pulse width	I <sub>FP</sub>	100	100	100	100	100	100	100	100	mA
DC Forward Current Per Seg.		I <sub>F</sub>	30	30	30	30	30	30	30	30	mA
Reverse Current Per Seg.	V <sub>R</sub> =5V	I <sub>R</sub>	10	10	10	10	10	10	10	10	μA
Power Dissipation		P <sub>D</sub>	36	40	42	42	44	66	66	66	mW
Operating Temperature		T <sub>OPR</sub>	-40 to +80								°C
Storage Temperature		T <sub>TSG</sub>	-40 to +85								°C
Lead soldering temperature	1.60mm from body maximum 3 seconds		260								°C

Checked

Becky Sun

Approved

Jason Lou

Date


Aug/14/2013

PAGE 1 /2

# Ningbo Junsheng Electronics Co.,Ltd.

## 4.60" (10.00mm) 5x8 single color dot matrix Display


### PACKAGE DIMENSION

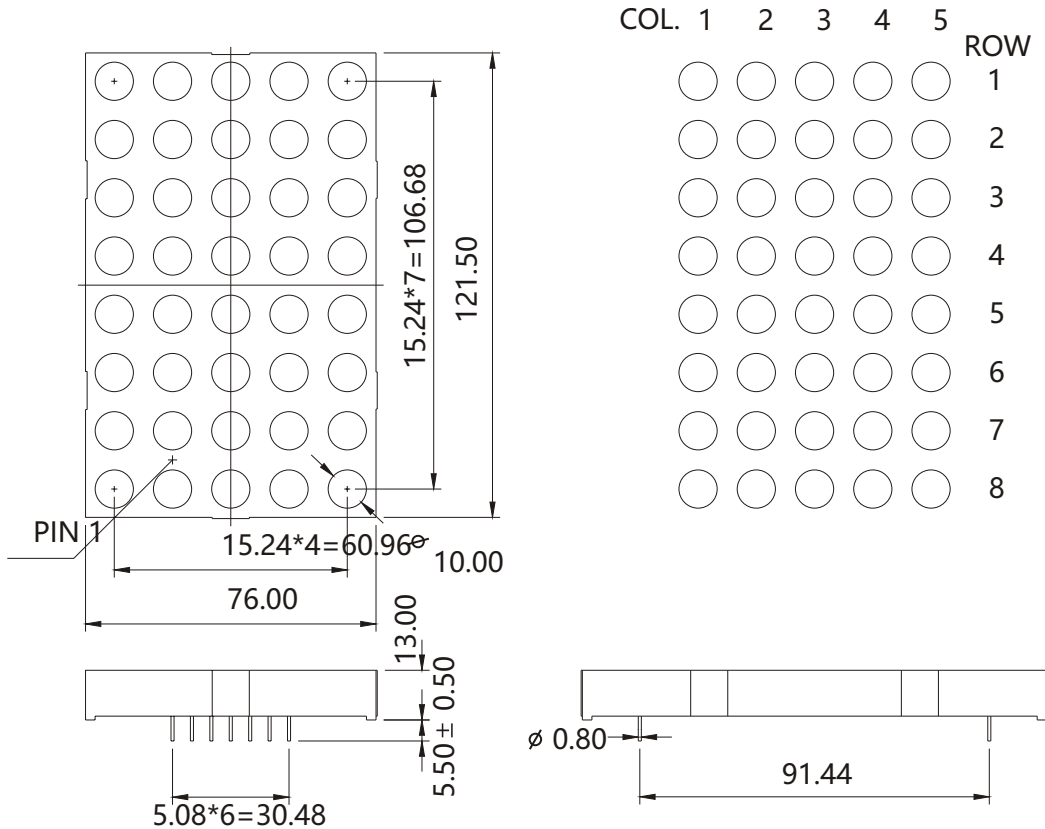


Tolerance  $\pm 0.25$ mm unless stated

### INTERNAL CIRCUIT DIAGRAM

Row Cathode  
Column Anode  
JSD-46581Cx

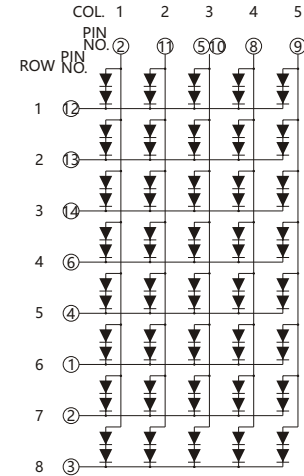

Row Anode  
Column Cathode  
JSD-46581Dx

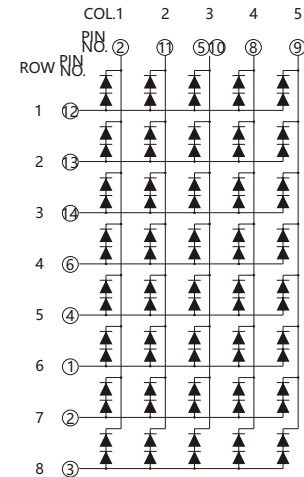

Checked

Becky Sun

Approved

Jason Lou

Date

Aug/14/2013

PAGE 2 /2