

Ningbo Junsheng Electronics Co.,Ltd.

30.4mm X 10.1mm 12 Segment Bi-Color Light Bar

Features:

- *Ultra dot intensity
- *Wide viewing angle
- *Bi-color
- *Gray face White segment
- *RoHS compliant

Available option:

- *Alternative face and dot color
- *Cropped terminal pins
- *Available emitting color
- *Low current version

Electro/Optical Characteristics If=20mA Ta=25°C

Part Number Common Cathode	Part Number Common Anode	Emitting Colors	Peak Wavelength	Forward Voltage V		Luminous Intensity Iv	
				Typ.	Max.	Min.	Typ.
JSA-R123010AURUG-21	JSA-R123010BURUG-21	AlGaInP/GaAs Super Red	640	2.00	2.50	10.00	20.00
		AlGaInP/GaAs Yellow Green	574	2.10	2.50	10.00	15.00
JSA-R123010AUEUG-21	JSA-R123010BUEUG-21	AlGaInP/GaAs Ultra Red	625	2.00	2.50	40.00	80.0
		AlGaInP/GaAs Yellow Green	574	2.10	2.50	10.00	15.00
Units			nm	V		mcd	

Maximum Ratings Ta=25 C (Derate above 25 C)

Characteristic	Test Condition	Symbol	UR	UE	UG	PG		Units
Pulse Forward Current Per Seg.	1/10 duty cycle 0.1ms Pulse width	I _{FP}	100	100	100	100		mA
DC Forward Current Per Seg.		I _F	30	30	30	30		mA
Reverse Current Per Seg.	V _R =5V	I _R	10	10	10	10		μA
Power Dissipation		P _D	36	40	44	66		mW
Operating Temperature		T _{OPR}	-40 to +80					°C
Storage Temperature		T _{TSG}	-40 to +85					°C
Lead soldering temperature	1.60mm from body maximum 3 seconds		260					°C

Checked

Becky Sun

Approved

Jason Lou



Date

Aug/14/2013

PAGE 1 /2


30.4mm X 10.1mm 12 Segment Bi-Color Light Bar

PACKAGE DIMENSION

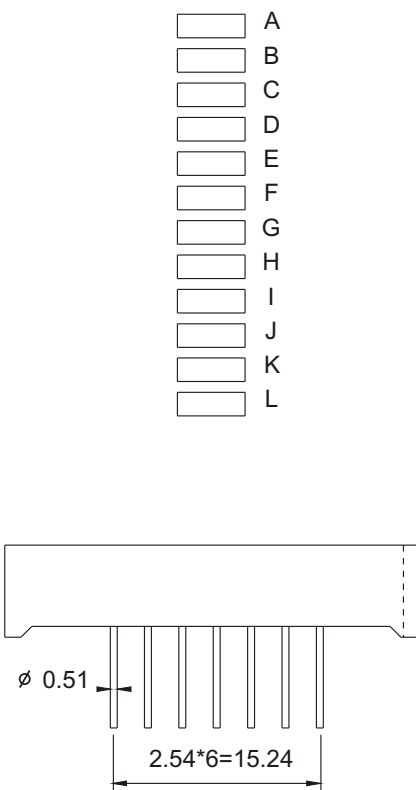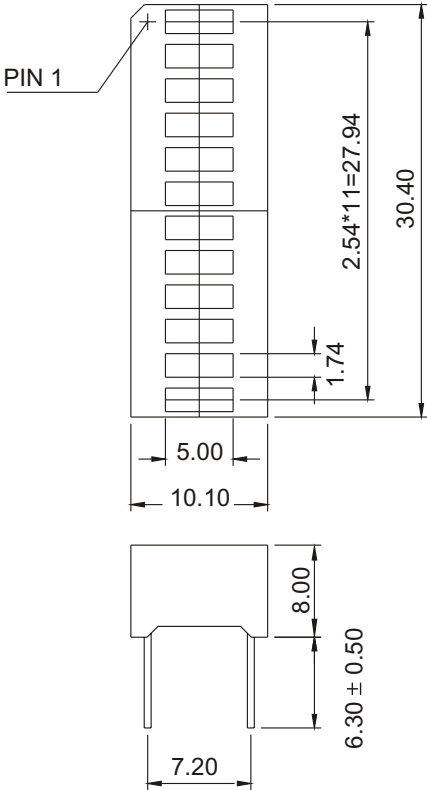

INTERNAL CIRCUIT DIAGRAM

Common Cathode
JSA-R123010Axx

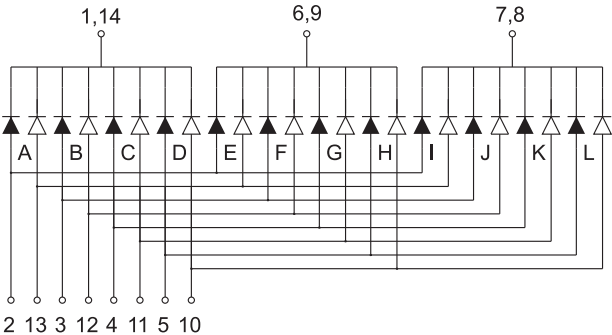

Common Anode
JSA-R123010Bxx

