



Part No.: JSL-1860PGC

Features:

- Single color
- High bright output
- Low power consumption
- High reliability and long life

Descriptions:

- Super Flux LED Lamp
- Emitting Color: Super Bright Pure Green
- Device Outline: Square(7.62mm x 7.62mm) with 3mm dome
- Lens Type: Water Clear


Application:

- Automotive lighting.
 - Electronic signs and signals.
 - Special Lighting Application
-



Part No.: JSL-1860PGC

Package Dimension:

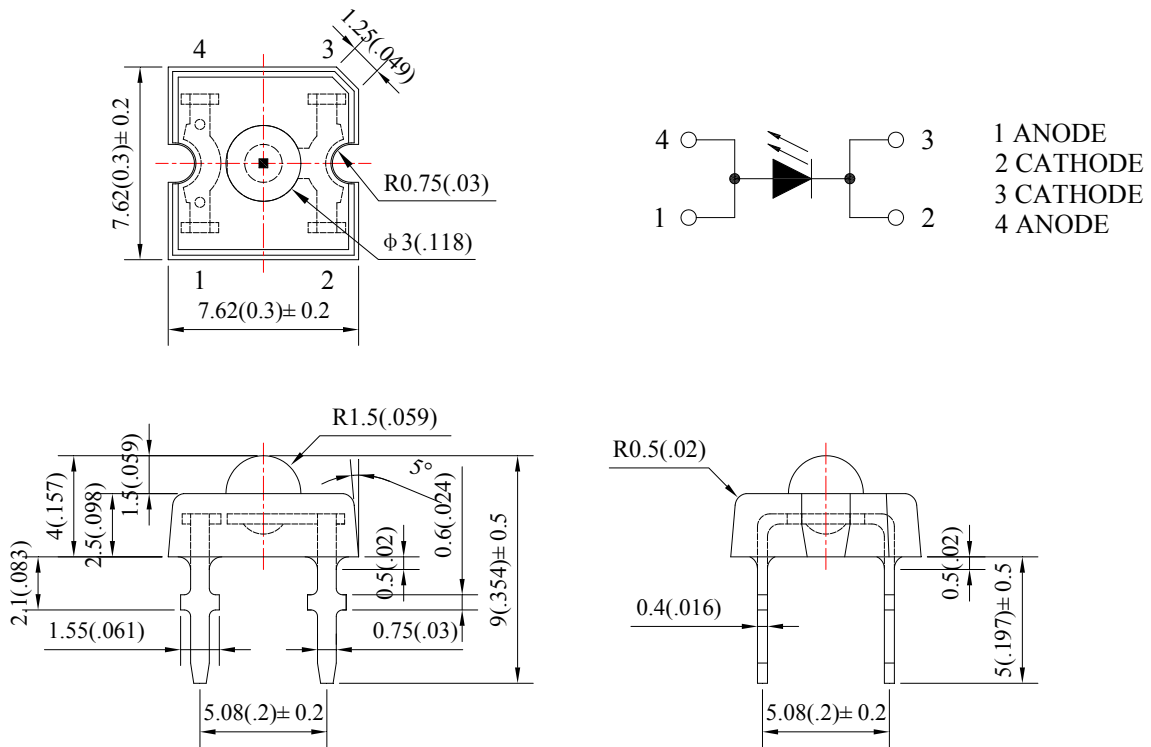

Notes:

1. All dimensions are millimeters/单位: mm.
2. Tolerance is +/-0.25mm unless otherwise noted/
没有标注的公差均为±0.25mm



Part No.: JSL-1860PGC

Absolute maximum ratings (Ta = 25°C)

| Parameter | Symbol | Test Condition | Values | | Unit |
|-----------------------|-------------------|------------------------|--------|------|------|
| | | | Min. | Max. | |
| Reverse Voltage | V _R | I _R = 5 μ A | 5 | -- | V |
| Forward Current | I _F | ---- | ---- | 25 | mA |
| Power Dissipation | P _d | ---- | ---- | 90 | mW |
| Pulse Current | I _{peak} | Duty=0.1mS, 1kHz | ---- | 100 | mA |
| Operating Temperature | T _{opr} | ---- | -40 | +85 | °C |
| Storage Temperature | T _{str} | ---- | -40 | +100 | °C |

Electrical and optical characteristics (Ta = 25°C)

| Parameter | Symbol | Test Condition | Values | | | Unit |
|--------------------------|----------------|----------------------|--------|------|------|------|
| | | | Min. | Typ. | Max. | |
| Forward Voltage | V _F | I _F =20mA | 2.7 | 3.0 | 3.4 | V |
| Reverse Current | I _R | V _R =5V | ---- | ---- | 30 | μ A |
| Dominate Wavelength | λ _d | I _F =20mA | ---- | 525 | ---- | nm |
| Peak Wavelength | λ _p | I _F =20mA | ---- | 520 | ---- | nm |
| Spectral Line half-width | Δ λ | I _F =20mA | ---- | 35 | ---- | nm |
| Luminous Intensity | I _v | I _F =20mA | 5000 | 7500 | ---- | mcd |
| Viewing Angle | 2 θ 1/2 | I _F =20mA | ---- | 90 | ---- | deg. |



Typical electrical/optical characteristic curves:

Fig.1 正向电流 Vs. 正向电压

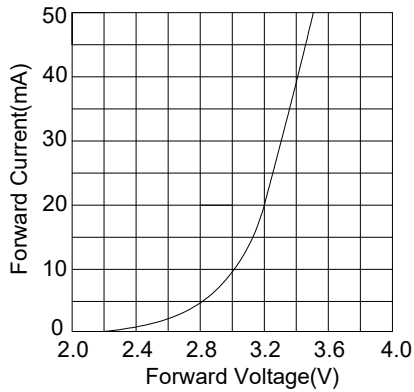


Fig.2 相对亮度 Vs. 正向电流

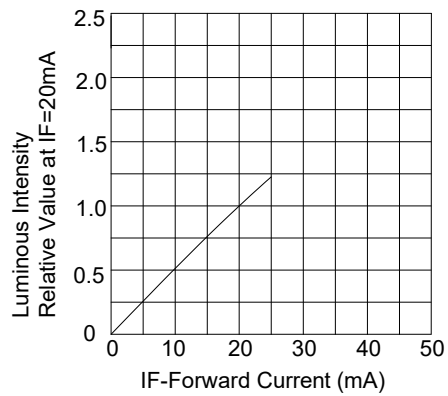


Fig.3 正向电流 Vs. 环境温度

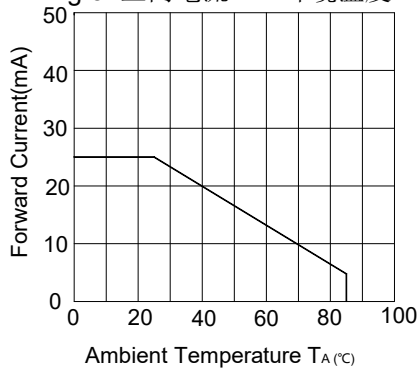


Fig.4 相对亮度 Vs. 环境温度

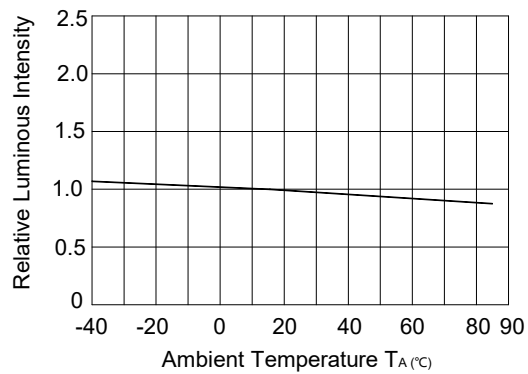


Fig.5 相对亮度 Vs. 波长

