



**Part No.: JSL-1880URC**

## **Features:**

- Single color
- High bright output
- Low power consumption
- High reliability and long life

## **Descriptions:**

- Super Flux LED Lamp
- Emitting Color: Super Bright Red
- Device Outline: Square(7.62mm x 7.62mm) with 5mm dome
- Lens Type: Water Clear

## **Application:**

- Automotive lighting.
  - Electronic signs and signals.
  - Special Lighting Application
-




# Ningbo Junsheng Electronics Co.,LTD.

JSTRONIC

Part No.: **JSL-1880URC**

## Package Dimension:

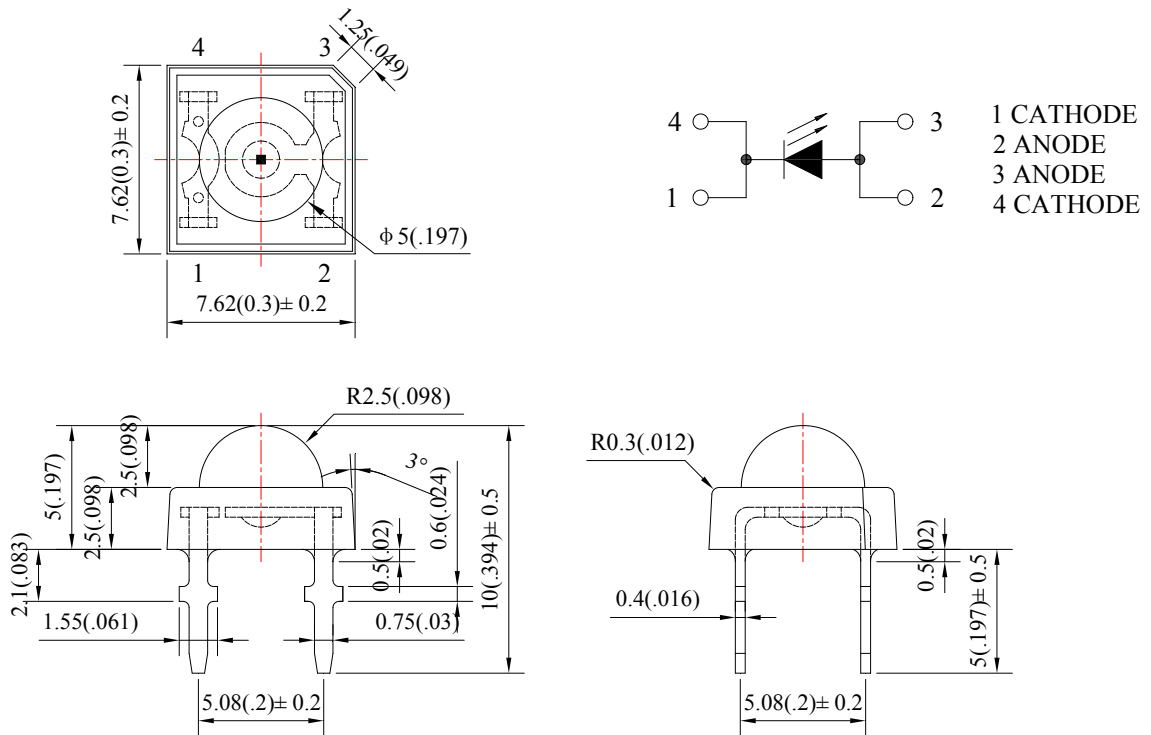

## Notes:

1. All dimensions are millimeters/单位: mm.
2. Tolerance is  $\pm 0.25$ mm unless otherwise noted/  
没有标注的公差均为  $\pm 0.25$ mm



Part No.: JSL-1880URC

**Absolute maximum ratings (Ta = 25°C)**

Parameter	Symbol	Test Condition	Values		Unit
			Min.	Max.	
Reverse Voltage	V <sub>R</sub>	I <sub>R</sub> = 30 μ A	5	--	V
Forward Current	I <sub>F</sub>	----	----	30	mA
Power Dissipation	P <sub>d</sub>	----	----	75	mW
Pulse Current	I <sub>peak</sub>	Duty=0.1mS, 1kHz	----	100	mA
Operating Temperature	T <sub>opr</sub>	----	-40	+85	°C
Storage Temperature	T <sub>str</sub>	----	-40	+100	°C

**Electrical and optical characteristics (Ta = 25°C)**

Parameter	Symbol	Test Condition	Values			Unit
			Min.	Typ.	Max.	
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =20mA	1.8	2.0	2.4	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	----	----	30	μ A
Dominate Wavelength	λ <sub>d</sub>	I <sub>F</sub> =20mA	----	624	----	nm
Peak Wavelength	λ <sub>p</sub>	I <sub>F</sub> =20mA	----	632	----	nm
Spectral Line half-width	Δ λ	I <sub>F</sub> =20mA	----	20	----	nm
Luminous Intensity	I <sub>v</sub>	I <sub>F</sub> =20mA	1000	1500	----	mcd
Viewing Angle	2 θ 1/2	I <sub>F</sub> =20mA	----	90	----	deg.



Typical electrical/optical characteristic curves:

Fig.1

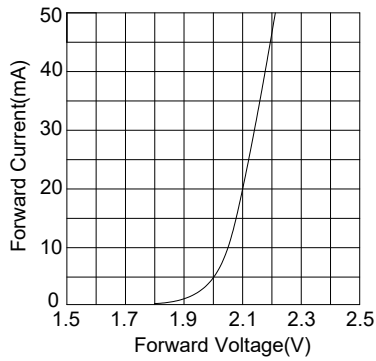


Fig.2

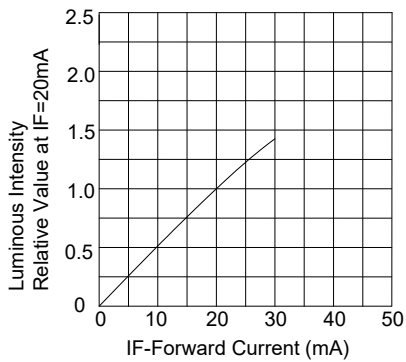


Fig.3

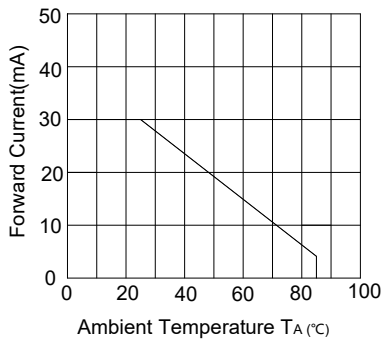


Fig.4

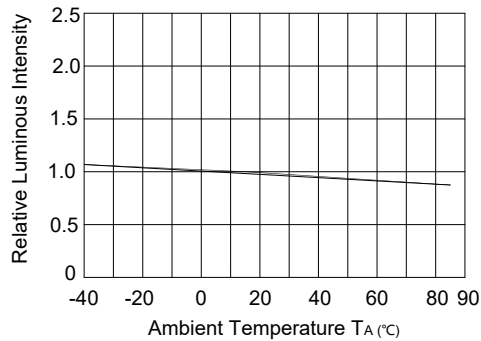


Fig.5

