



## Features:

- Single color
- Low power UVA LED.
- Low power consumption
- High reliability and long life
- Compliance with EU REACH

## Descriptions:

- Emitting Color: Super Bright UV
- Device Outline: 3mm Round With Flange Type
- Lens Type: Water Clear
- The LED is suitable for UV application.


## Application:

- Photo catalyst excitation.
- Sensor.
- QA equipment
- Counterfeit Bill Detection



Part No.: JSL-303UVC

Package Dimension:

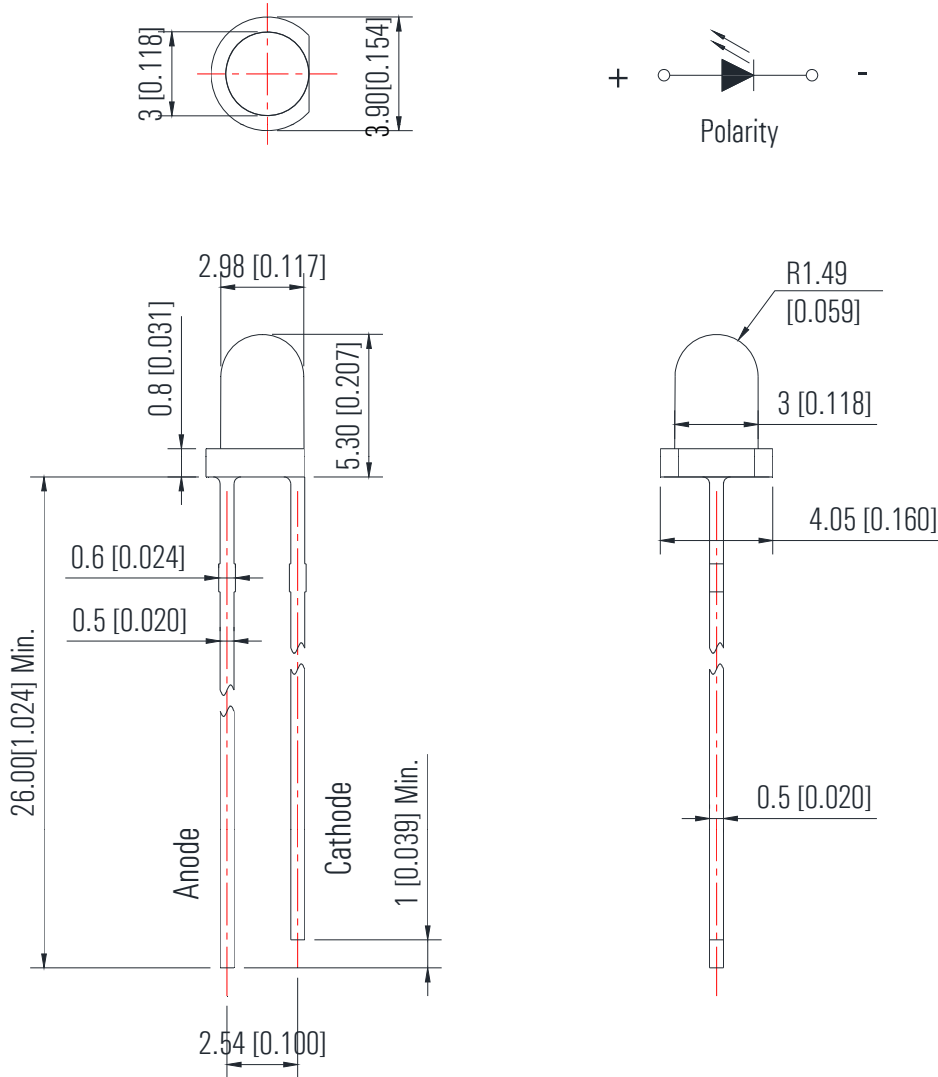

Notes:

1. All dimensions are millimeters/单位: mm.
2. Tolerance is +/-0.25mm unless otherwise noted/  
没有标注的公差均为±0.25mm



Part No.: **JSL-303UVC**

**Absolute maximum ratings (Ta = 25°C)**

Parameter	Symbol	Test Condition	Values		Unit
			Min.	Max.	
Reverse Voltage	V <sub>R</sub>	I <sub>R</sub> = 30 μ A	----	5	V
Forward Current	I <sub>F</sub>	----	----	25	mA
Power Dissipation	P <sub>d</sub>	----	----	85	mW
Pulse Current	I <sub>peak</sub>	Duty=0.1mS, 1kHz	----	100	mA
Operating Temperature	T <sub>opr</sub>	----	-40	+85	°C
Storage Temperature	T <sub>str</sub>	----	-40	+85	°C

**Electrical and optical characteristics (Ta = 25°C)**

Parameter	Symbol	Test Condition	Values			Unit
			Min.	Typ.	Max.	
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =20mA	2.8	3.2	3.8	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	----	----	30	μ A
Dominate Wavelength	λ <sub>d</sub>	I <sub>F</sub> =20mA	----	400	----	nm
Spectral Line half-width	Δ λ	I <sub>F</sub> =20mA	----	20	----	nm
Luminous Intensity	I <sub>v</sub>	I <sub>F</sub> =20mA	100	200	----	mcd
Viewing Angle	2 θ 1/2	I <sub>F</sub> =20mA	----	30	----	deg.



### Typical electrical/optical characteristic curves: (25°C Ambient Temperature Unless Otherwise Noted)

