

Ningbo Junsheng Electronics Co.,LTD.

产品承认书

PRODUCT APPROVED

() _____

() _____

(PART NUMBER) _____

() _____

() _____

Specification	INSPECTION	SAMPLE	OTHERS
(APPROVED BY)	(CHECKED BY)	(PROOFREAD BY)	(PREPARED BY)

Version	Date	Description	Maker

(CUSTOMER VERDICT)

(OK)

11

(NG)

10

(APPROVED BY):

(APPROVED DATE):

(IMPROVED ADVICE):

REMARK: FOR OFFERING THE BEST SERVICE TO CUSTOMER, PLEASE FAX THE DATA TO FACTORY IN TIME


1.DESRIPTION:

- , White Epoxy
- Common cathode
-
-

2.FEATURES:


- High intensity and reliability
- High quality, Low power requirement
- IC compatible , Easy assembly
-

3 PACKAGE DIMENSION

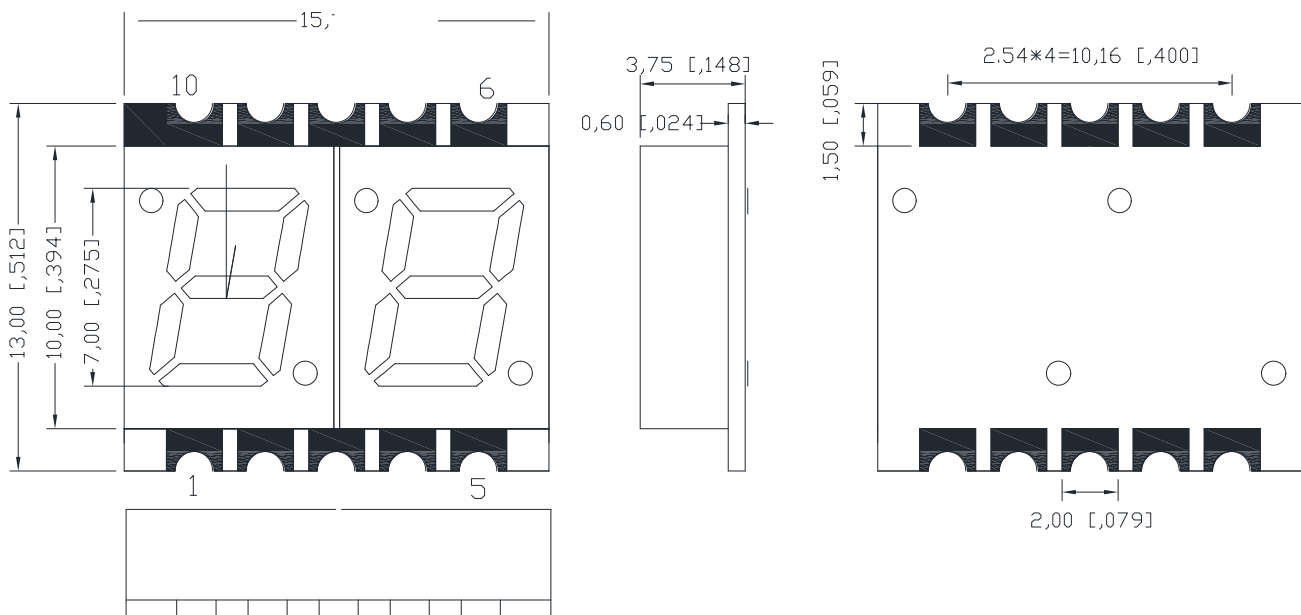

±

4.INTERNAL CIRCUIT DIAGRAM

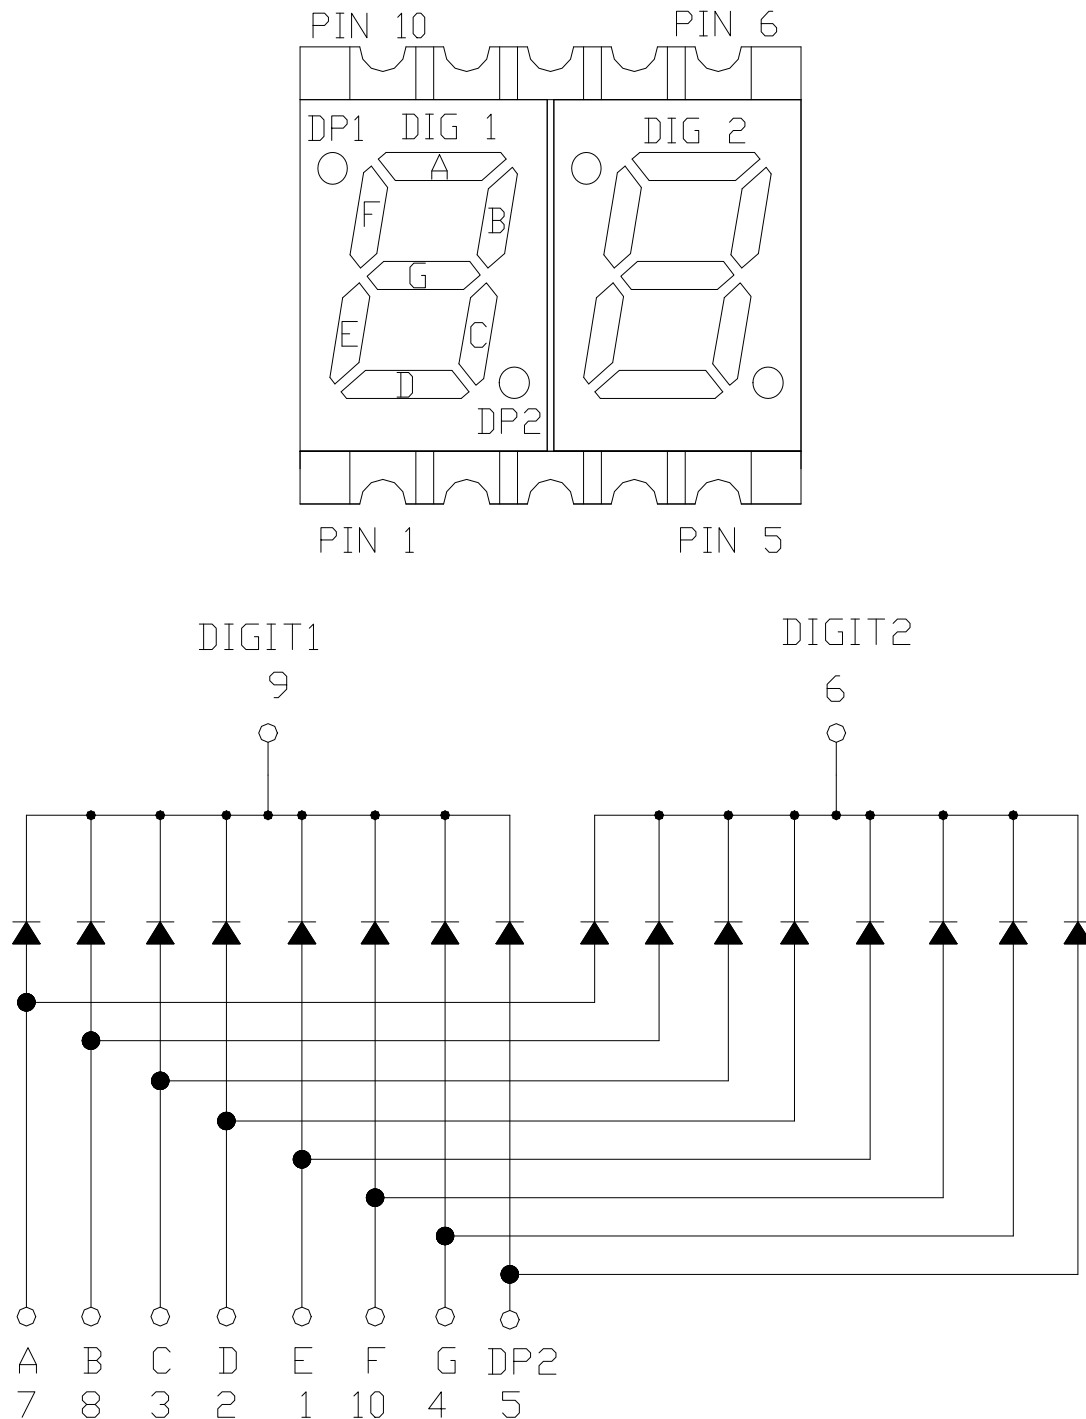




5.ABSOLUTE MAXIMUM RATINGS AT T_a=25°C:


		°C	

6.ELECTRICAL/OPTICAL CHARACTERISTICS AT T_a=25°C:

7.Recommended Soldering Pattern:

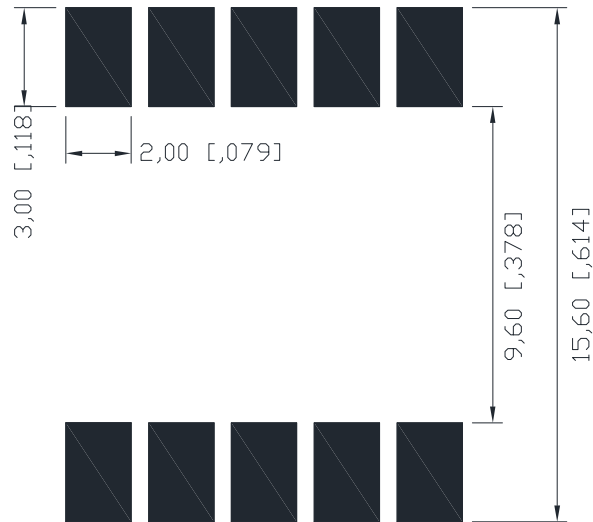


8、推荐的 SMT 焊接曲线 Recommended SMT condition:

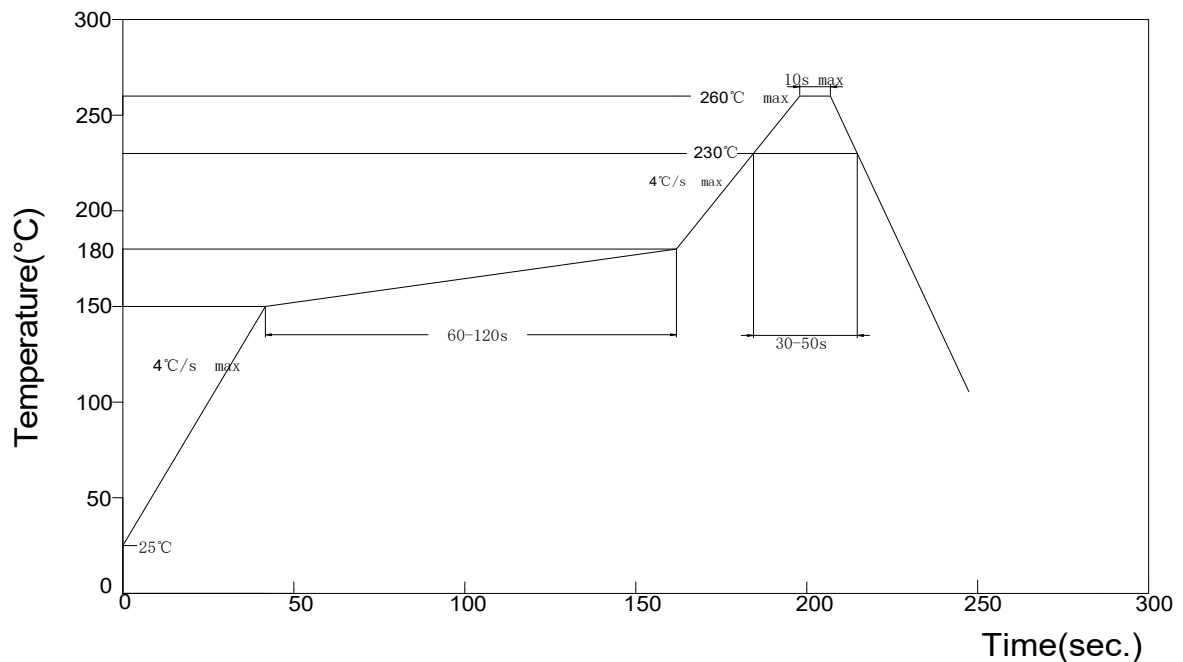


NOTES:

- 1.We recommend the reflow temperature 245°C (+/-5°C) 。 The maximum soldering temperature should be limited to 260°C 。
- 2.Don't cause stress to the epoxy resin while it is exposed to high temperature。
- 3.Number of reflow process shall be 2 times or less.

9.Reel Dimensions:

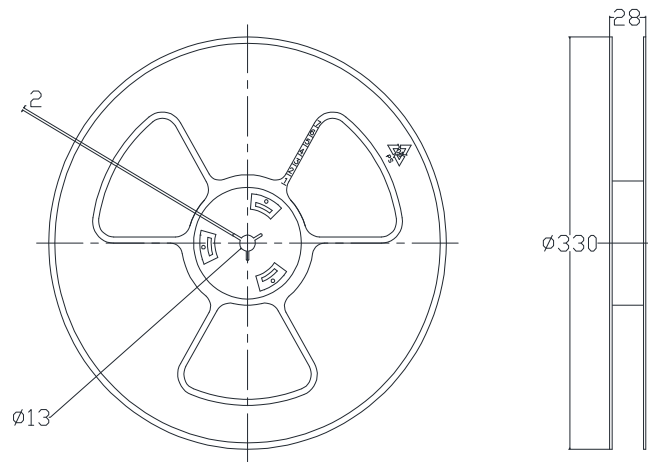

10.Packing and Lable Specifications:

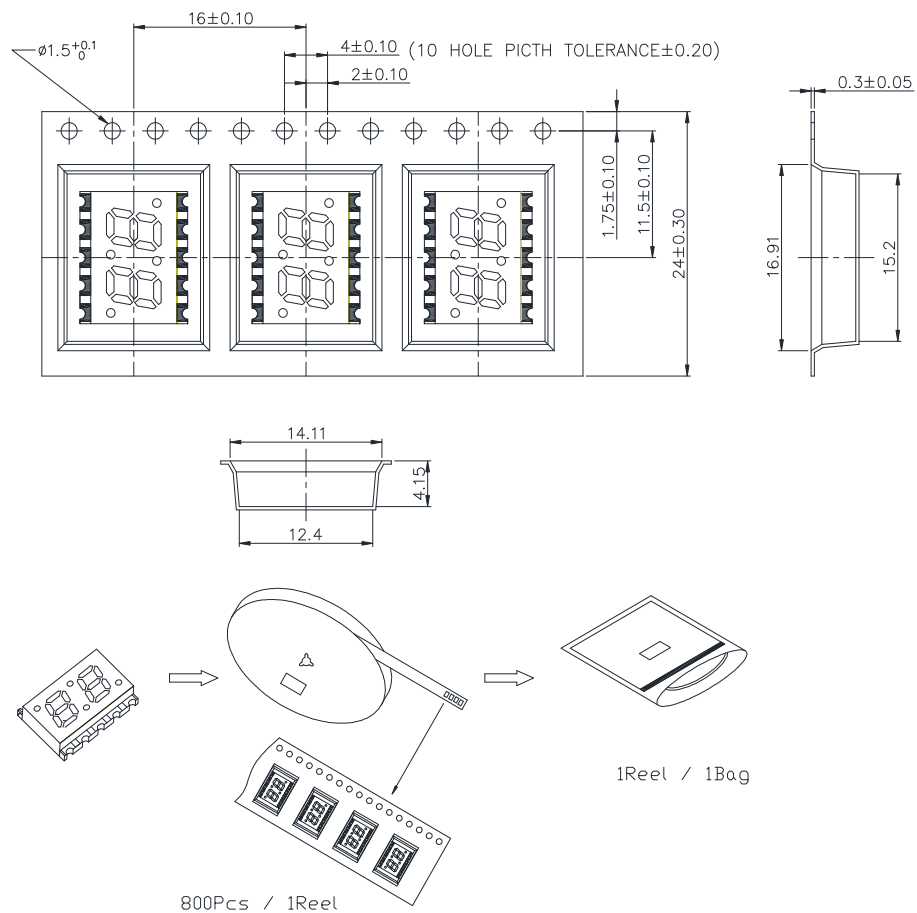

Note: The specifications are subject to change without notice. Please contact us for updated information.