



Part No.: JSL-502UVC

Features:

- Single color
- Low power UVA LED.
- Low power consumption
- High reliability and long life
- Compliance with EU REACH

Descriptions:

- Emitting Color: Super Bright UV
- Device Outline: 5mm Round With Flange Type
- Lens Type: Water Clear
- The LED is suitable for UV application.


Application:

- Photo catalyst excitation.
- Sensor.
- QA equipment
- Counterfeit Bill Detection



Part No.: JSL-502UVC

Package Dimension:

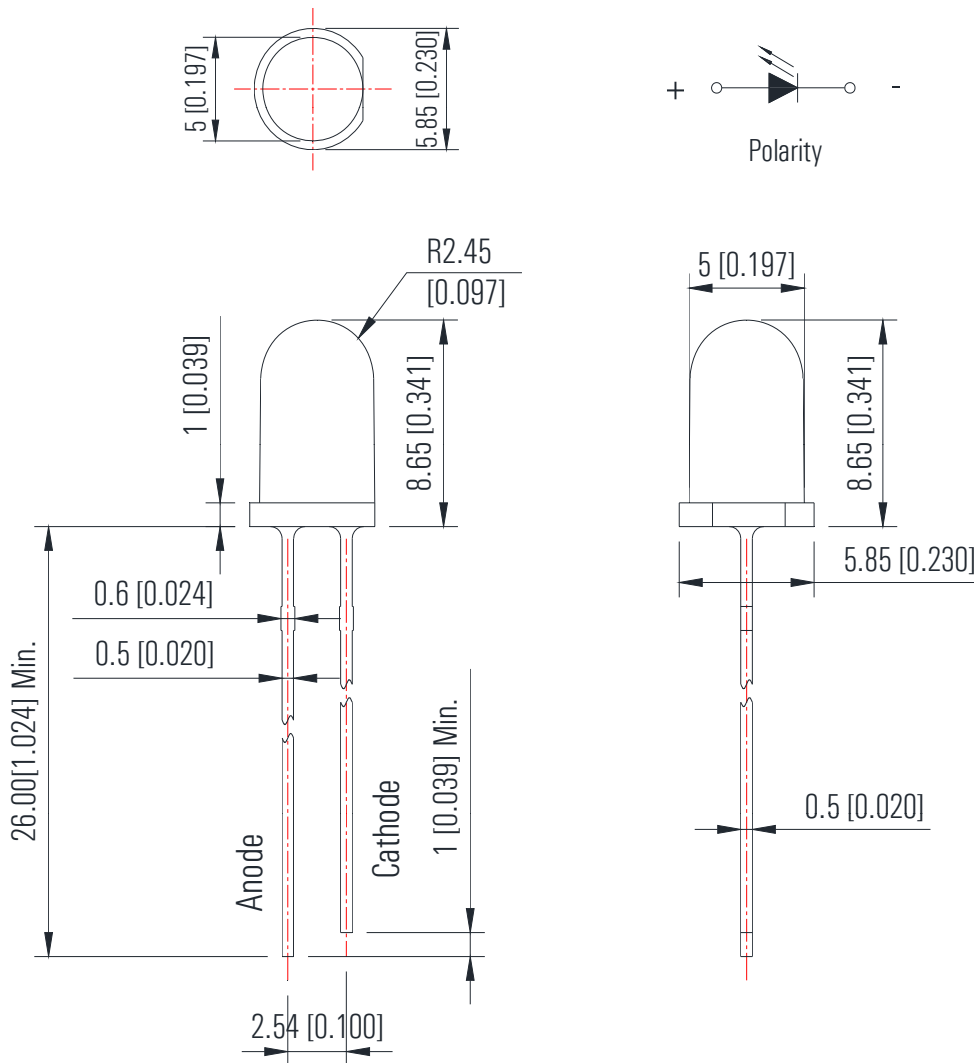

Notes:

1. All dimensions are millimeters/单位: mm.
2. Tolerance is +/-0.25mm unless otherwise noted/
没有标注的公差均为±0.25mm



Part No.: **JSL-502UVC**

Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Test Condition	Values		Unit
			Min.	Max.	
Reverse Voltage	V _R	I _R = 30 μ A	----	5	V
Forward Current	I _F	----	----	25	mA
Power Dissipation	P _d	----	----	85	mW
Pulse Current	I _{peak}	Duty=0.1mS, 1kHz	----	100	mA
Operating Temperature	T _{opr}	----	-40	+85	°C
Storage Temperature	T _{str}	----	-40	+85	°C

Electrical and optical characteristics (Ta = 25°C)

Parameter	Symbol	Test Condition	Values			Unit
			Min.	Typ.	Max.	
Forward Voltage	V _F	I _F =20mA	2.8	3.2	3.8	V
Reverse Current	I _R	V _R =5V	----	----	30	μ A
Dominate Wavelength	λ _d	I _F =20mA	----	400	----	nm
Spectral Line half-width	Δ λ	I _F =20mA	----	20	----	nm
Luminous Intensity	I _v	I _F =20mA	200	400	----	mcd
Viewing Angle	2 θ 1/2	I _F =20mA	----	15	----	deg.



Typical electrical/optical characteristic curves: (25°C Ambient Temperature Unless Otherwise Noted)

