

Part No.: JSL-1206URUG

Features:

- Long life solid state reliability.
- Low power consumption
- I.C.compatible.
- Compliance with EU REACH.
- RoHs Compliant

Descriptions:

- Emitting Color: Red+Yellow Green Bi-Color.
- Device Outline: 3.2x2.7x1.1mm
- Lens Type: Water Clear.
- The designed for a variety of applications where require dual illumination.



Application:

- Circuit board.
- Indicators.
- Computer.
- Home appliance.
- Industrial.




Part No.: **JSL-1206URUG**



Package Dimension:

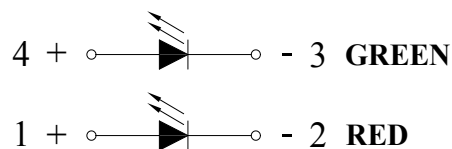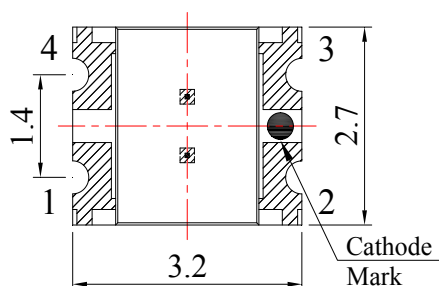

Polarity

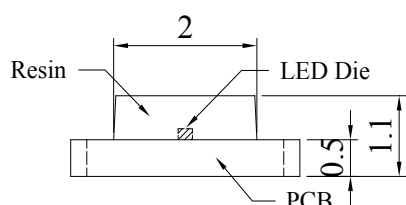

Recommended Soldering Pad Dimensions

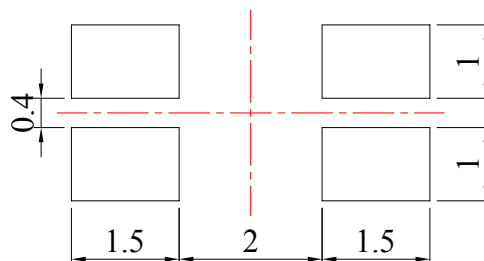

Unit: mm
Tolerance: $\pm 0.10\text{mm}$

Notes:

1. All dimensions are millimeters/单位: mm.
2. Tolerance is $\pm 0.25\text{mm}$ unless otherwise noted/
没有标注的公差均为 $\pm 0.25\text{mm}$



Part No.: **JSL-1206URUG**

Absolute maximum ratings (Ta = 25°C)







Parameter	Symbol	Test Condition	Values		Unit
			Min.	Max.	
Reverse Voltage	V _R	I _R = 30 μA	----	5	V
Forward Current	I _F	----	----	25	mA
Power Dissipation	P _d	----	Red	60	mW
			Yellow Green	60	
Pulse Current	I _{peak}	Duty=0.1mS, 1kHz	----	100	mA
Operating Temperature	T _{opr}	----	-40	+85	°C
Storage Temperature	T _{str}	----	-40	+85	°C

Electrical and optical characteristics (Ta = 25°C)

Parameter	Symbol	Test Condition	Color	Value			Unit
				Min.	Typ.	Max.	
Forward Voltage	V _F	I _F = 20mA	UR	1.8	2.0	2.4	V
			UG	1.8	2.0	2.4	
Reverse Current	I _R	V _R = 5V	UR	---	---	5	μA
			UG	---	---	5	
Dominate Wavelength	λ _d	I _F = 20mA	UR	---	624	---	nm
			UG	---	570	---	
Peak Wavelength	λ _p	I _F = 20mA	UR	---	632	---	nm
			UG	---	573	---	
Spectral Line half-width	Δλ	I _F =20mA	UR	----	20	----	nm
			UG				
Luminous Intensity	I _v	I _F = 20mA	UR	100	140	----	mcd
			UG	30	40	----	
Viewing Angle	2θ 1/2	I _F = 20mA	UR	---	120	---	deg
			UG				

Part No.: JSL-1206URUG

Typical electrical/optical characteristic curves:
(25°C Ambient Temperature Unless Otherwise Noted)

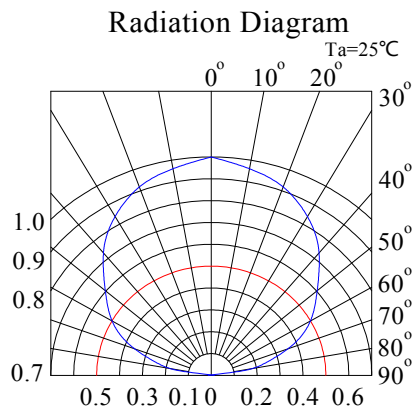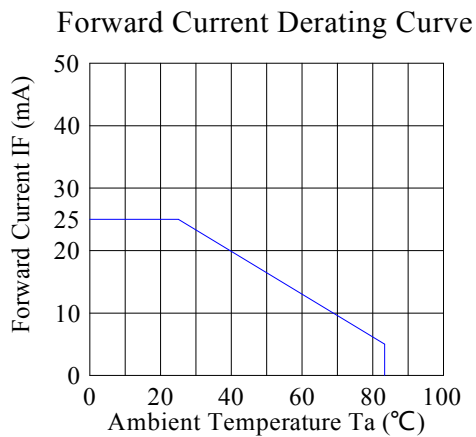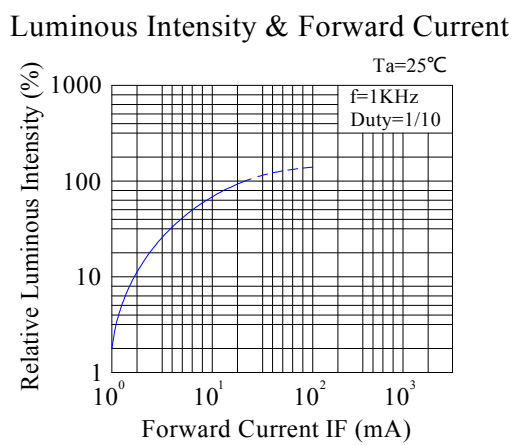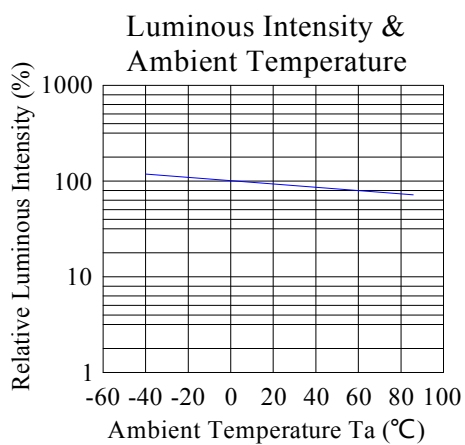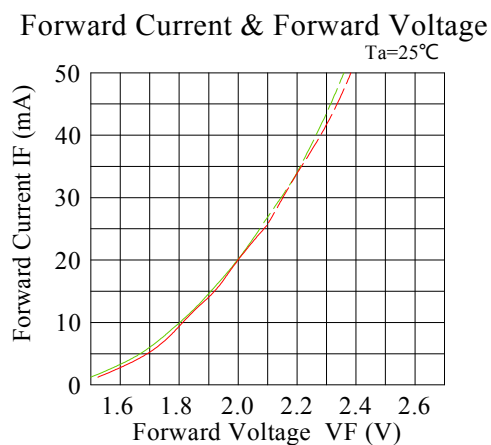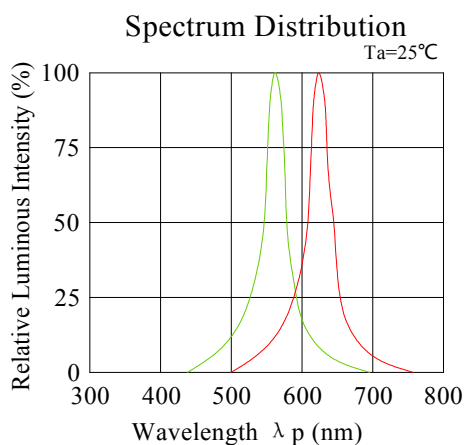



Technical drawing of a circular mechanical part, likely a flange or end plate, showing a top view and a side view.

Top View Dimensions:

- Overall diameter: $\phi 178$
- Inner circular feature diameter: $\phi 13.0$
- Radial distance from center to the inner feature: 2.2
- Four curved slots are distributed around the inner circle.
- A central circular feature is located at the center.

Side View Dimensions:

- Overall thickness: 9.0
- Inner feature thickness: 12.0
- Outer diameter: $\phi 60$
- Overall height: 178

Technical drawing of a 5-pin connector. The drawing includes a top view and a side view. The top view shows a rectangular connector with five pins. The dimensions are as follows:

- Overall width: 8.00 ± 0.20 mm
- Pin pitch (center-to-center): 4.00 ± 0.10 mm
- Pin diameter: $\phi 1.50 \pm 0.10$ mm
- Pin length (from top surface): 3.50 ± 0.05 mm
- Pin length (from bottom surface): 3.35 ± 0.10 mm
- Pin length (from side view): 1.27 ± 0.10 mm
- Pin length (from top view): 0.23 ± 0.10 mm
- Pin length (from side view): 1.75 ± 0.10 mm
- Pin length (from top view): 2.00 ± 0.05 mm
- Pin length (from top view): 4.00 ± 0.10 mm
- Pin length (from top view): 2.82 ± 0.10 mm




The drawing also includes a polarity diagram on the left, showing the Green and Red pins. The Green pin is marked with a minus sign (-) and the Red pin is marked with a plus sign (+). The text "Polarity" is written below the diagram.

Unit: mm
Tolerance: ± 0.10 mm




Part No.: JSL-1206URUG

Packaging:

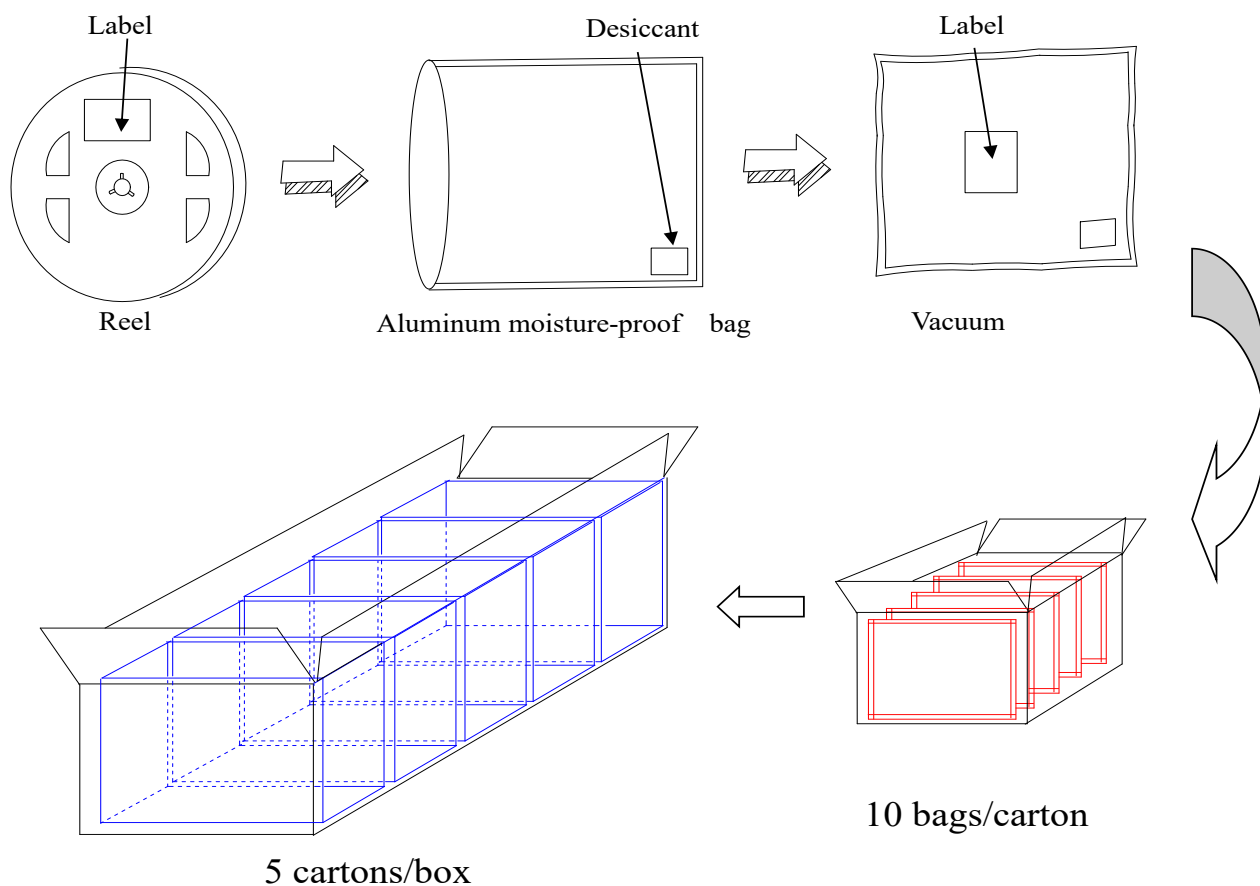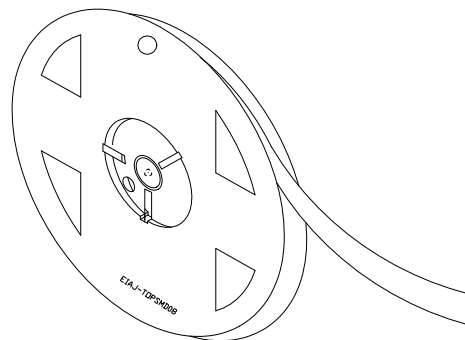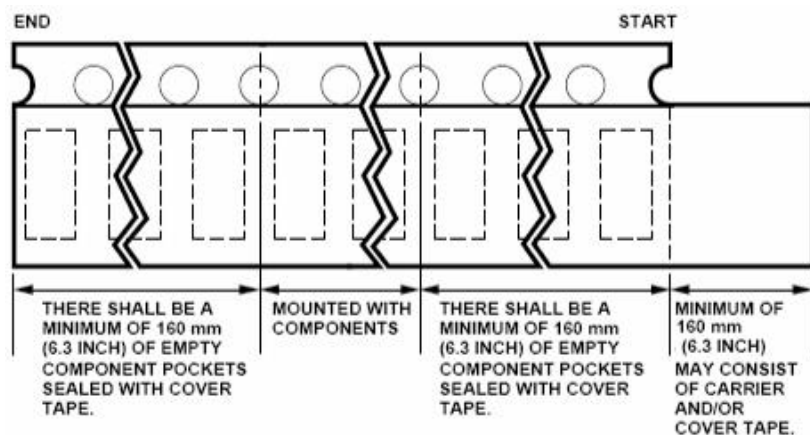

Soldering Profile Suggested:

1. Pb-free solder temperature profile

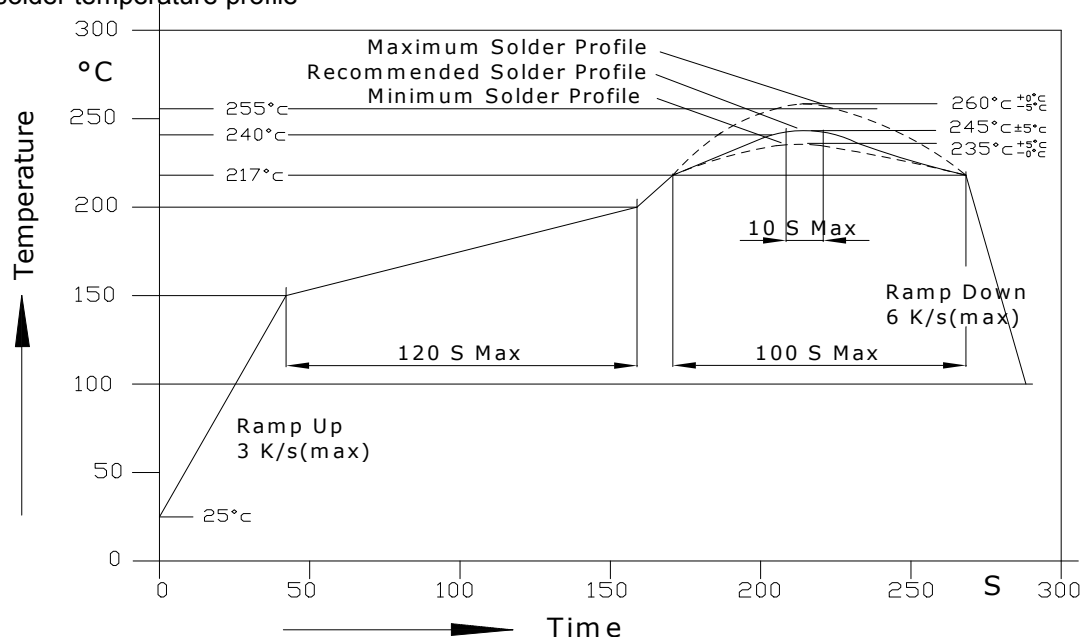

2. Reflow soldering should not be done more than two times.
3. When soldering, do not put stress on the LEDs during heating.
4. After soldering, do not warp the circuit board.
5. Recommended soldering conditions:


Reflow soldering		Soldering iron	
Pre-heat	150~200°C	Temperature	300°C Max.
Pre-heat time	120 sec. Max.	Soldering time	3 sec. Max.
Peak temperature	260°C Max.		(one time only)
Soldering time	10 sec. Max.(Max. two times)		

Part No.: JSL-1206URUG


Cautions:

Application

1. A LED is a current-operated device. The slight shift of voltage will cause big change of current, which will damage LEDs. Customer should use resistors in series for the Over-Current-Proof.
2. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended to use individual resistor separately, as shown in Circuit A below. The brightness of each LED shown in Circuit B might appear difference due to the differences in the I-V characteristics of those LEDs.

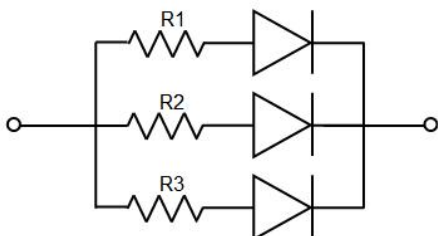

Circuit model A

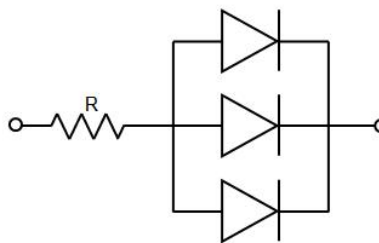

Circuit model B

3. High temperature may reduce LEDs' intensity and other performances, so keeping it away from heat source to get good performance is necessary.

Storage

1. Before opening original package, it is recommended to store them in the following environment:
Temperature: 5°C~30°C Humidity: 85%RH max.
2. After opening original package, the storage ambient for the LEDs should be in 5~30°C temperature and 60% or less relative humidity.
3. In order to avoid moisture absorption, it is recommended that the LEDs that out of the original package should be stored in a sealed container with appropriate desiccant, or in desiccators with nitrogen ambient.
4. The LEDs should be used within 168hrs (7 days) after opening the package. Once been mounted, soldering should be quick.
5. If the moisture absorbent material (silica gel) has faded away or the LEDs stored out of original package for more than 168hrs (7 days), baking treatment should be performed using the conditions: 60°C at least 24 hours.

Part No.: JSL-1206URUG

ESD (Electrostatic Discharge)-Protection

A LED (especially the Blue、 White and Green product) is an ESD sensitive component, and static electricity or power surge will damage the LED. ESD-damaged LEDs will exhibit abnormal characteristics such as high reverse leakage current, low forward voltage, or “no light-up” at low currents, etc.

Some advice as below should be noticed:

1. A conductive wrist strap or anti-electrostatic glove should be worn when handling these LEDs.
2. All devices, equipment, machinery, work tables and storage racks, etc. must be properly grounded.
3. Use anti-static package or boxes to carry and storage LEDs. And ordinary plastic package or boxes is forbidden to use.
4. Use ionizer to neutralize the static charge during handling or operating.
5. All surfaces and objects within 1 ft close to LEDs measure less than 100V.

Cleaning

Use alcohol-based cleaning solvents such as IPA (isopropyl alcohol) to clean LEDs if necessary.

Soldering

1. Soldering condition refer to the draft “Soldering Profile Suggested” on page 1.
2. Reflow soldering should not be done more than 2 times.
3. Manual soldering is only suggested on repair and rework. The maximum soldering temperature should not exceed 300°C within 3 sec. And the maximum capacity of soldering iron is 30W in power.
4. During the soldering process, do not touch the lens at high temperature.
5. After soldering, any mechanical force on the lens or any excessive vibration shall not be accepted to apply, also the circuit board shall not be bent as well.

Others

1. The LEDs described here are intended to be used for ordinary electronic equipment (such as office equipment, communication equipment and household applications).Consult CMH’s Sales in advance for the applications in which exceptional reliability is required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health. (such as in aviation, transportation, traffic control equipment, medical and life support systems and safety devices).
2. The light output from the high luminous intensity LEDs may cause injury to human eyes when viewed directly.
3. The appearance and specifications of the product may be modified for improvement without prior notice.